


OPERATOR'S MANUAL  
使用说明书  
FLASHLIGHT

NEXTORCH®  
the smart light

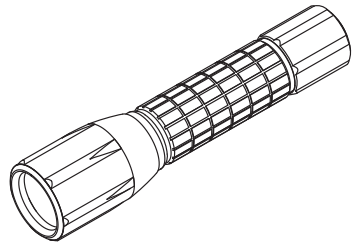

myTorch S AA

Learn more on [www.nextorch.com](http://www.nextorch.com)

请登陆：[www.nextorch.com](http://www.nextorch.com) 获取更详尽的产品资讯。

English

Congratulations on purchasing our NEXTORCH® flashlight. You have chosen a high quality product designed from the latest technology. For the best use of this product, please read the instruction manual carefully.

SPECIFICATION

Bulb	CREE® XP-G2 R5 LED
Battery	1*Alkaline AA (Included) or 1*Ni-MH AA
Output	130lm / 65lm / 2lm / Strobe
Run Time	1h / 2h / 30h / -
Beam Distance	81m / 265.75'
Waterproof	IPX-7, 1m / 3.28'
Impact Resistant	1m / 3.28'
Body Material	Aerospace grade aluminum 6061-T6 with hard-anodized finish
Lens Material	Anti-scratch Polycarbonate
Dimensions	Length: 120.0mm / 4.72" Head diameter: 26.4mm / 1.04" Body Diameter: 19.2mm / 0.76"
Weight	1.98oz / 56 g (Without battery)

FEATURES



CREE® XP-G2 R5 LED, max output up to 130 lumens


**PC Programmable**  
• Adjust the brightness and strobe frequency  
• Add / remove / insert a flashlight mode  
• Instant access to S.O.S. or various preset lighting modes

**Rechargeable**  
USB rechargeable by PC, wall charger and in-car charger


Aerospace grade aluminum body  
Powered by 1\*AA batteries, compatible with non-rechargeable alkaline batteries or rechargeable Ni-MH batteries

QUICK START GUIDE

• BATTERY INSTALLATION



• MOMENTARY ON / OFF



Lightly Press


中文

尊敬的用户，恭喜您拥有了纳丽德手电。它选用最好的材料，经科学的设计，精密的制造工艺，呈现在您的面前。为了您能对我们的产品有全面的了解，请仔细阅读我们为您准备的《使用说明书》。

参数

灯泡	CREE® XP-G2 R5 LED
电源	1*AA碱性电池 (标配) / 1*AA镍氢电池
亮度	130流明/65流明/2流明/爆闪
续航时间	1小时/2小时/30小时/-
照射距离	81米
防水等级	IPX-7, 1米
抗摔高度	1米
筒身材料	航天等级强化铝材6061-T6 经II型硬质阳极氧化表面处理
镜片材料	强化玻璃
尺寸	长度：120毫米； 筒头直径：26.4毫米 筒身直径：19.2毫米；
重量	56克 (不含电池)

产品特点




CREE® XP-G2 R5 LED, 最高亮度130流明

**内置开放式可编程智能控制芯片**, 可连接电脑个性化设定手电模式:  
1. 调整手电的亮度, 闪烁的频率;  
2. 增加, 删除, 插入手电模式;  
3. 一键导入S.O.S.求救信号;  
4. 自定义信号模式


USB直充设计, 随时随地, 即插即充  
航天等级强化铝材6061-T6, 经II型硬质阳极氧化  
1\*AA电池, 兼容不可充碱性电池 (标配) 和可充镍氢电池

快速入门

• 电池安装




• 瞬间点亮




轻按

• CONSTANT ON / OFF



Click


• Mode Switch



High  
Medium  
Low  
Strobe  
Flash


HOW TO CHARGE

Unscrew the head to reveal the charging USB interface, then connect the flashlight with computer / charger via USB cable.

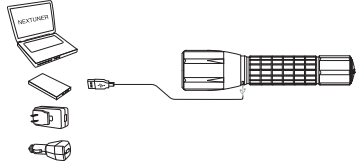

When the light indicator appears:  
1) RED: Charging in progress  
2) GREEN: Fully charged  
3) OFF: Without battery / Connection not made  
myTorch S AA's Charging Time: 5 hours charged by USB port of a computer

HOW TO PROGRAM YOUR OWN MODES



Download the NEXTUNER3.0 and NEXTUNER instruction for free on <http://www.nextorch.cn/mytorch/en/download/>. Connect the flashlight with computer, and open NEXTUNER to program your own modes 【Details in NEXTUNER instruction】

NOTICE

1. Do not shine directly into eyes as the powerful light could cause a permanent injury.
2. Do not dismantle the bulb assembly.

MAINTENANCE

To keep your flashlight in perfect working condition, follow the instructions below.

- (1) Clean your flashlight with a soft clean cloth.
- (2) Wash the flashlight with fresh water after using in the seawater or causticity liquid, and dry it with warm air.
- (3) When the tail cap does not rotate smoothly, apply silicone grease on the "O" ring (You can buy the silicon grease in outdoor or hardware shops.)
- (4) Please remove the battery and keep them dry and cool when they are not in use for an extended period of time.


ACCESSORIES

NEXTORCH® offers a full range of product accessories suited for your flashlight. Learn more on [www.nextorch.com](http://www.nextorch.com). Compatible accessories for myTorch S AA: SL6, LC6, LR6 AA, UC1, UC2, UC3, UCC, DC1, V2, V1438, G46-A, HM1 Accessories included: USB Cable, Holster, Lanyard, Carry ring, The head o-ring, The tail o-ring

LIMITED LIFETIME WARRANTY


1. NEXTORCH® warrants that this product is free from manufacturing defects. NEXTORCH™ will repair or replace any defective flashlight, please contact your local dealer or send an email to [info@nextorch.com](mailto:info@nextorch.com).
2. The consumer will not have coverage or reimbursement under this warranty if the product has been subjected to abnormal use, unauthorized modifications or unauthorized repair.
3. Rechargeable batteries will be under warranty within one year from the date of purchase.
4. All of the original accessories that are delivered with this product (rechargeable batteries excluded) are not covered under this warranty.

• 常亮



重按


• 切换模式



高亮  
中亮  
低亮  
爆闪  
闪光灯


如何充电

旋转筒头, 插入数据线, 连接电源, 即可实现多样化方式充电

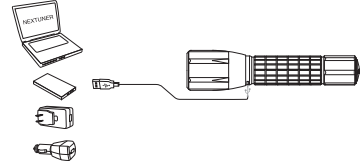

当充电指示灯显示:  
1) 红色: 充电进行中  
2) 绿色: 充电完毕  
3) 不亮: 未放入电池/连接未成功  
myTorch S AA充电时间: 电脑USB直充5小时

如何自定义模式



myTorch模式调制软件NEXTUNER3.0和NEXTUNER软件说明书下载<http://www.nextorch.cn/mytorch/cn/download/>. 旋转筒头, 插入数据线, 连接电脑, 打开NEXTUNER软件, 即可自定义手电模式【详见NEXTUNER软件使用说明书】

myTorch S AA 安全使用指南

1. 请不要将光线直射入人的眼睛, 较强的光线会对眼睛造成永久性伤害。
2. 请不要拆解灯头, 以免造成反光杯或灯泡损伤。

myTorch S AA 保养注意事项

每次使用后, 请遵循以下几点对电筒进行必要的保养, 使其能继续为您提供高质量的服务。

- (1) 每次使用后, 请用干净的软布对电筒进行擦拭。
- (2) 当电筒在沾染海水或腐蚀性液体时, 请及时用清水清洗, 并用电吹风吹干。(您可以到专业的户外店、五金店购买到此类产品, 或使用由纳丽德为您准备的专业硅脂, 请参考后面的附件说明。
- (3) 当灯头及尾盖拧动不畅时, 请在接口处涂少许硅脂。
- (4) 电筒在不使用时, 请将电池取出, 放在阴凉处保存。

附件支持

为了满足您对电筒的不同需求, 并使电筒得到全面的维护, 我们设计了一系列的配件。请根据您的个人需要进行选择, 如需详细了解附件参数, 请登陆网站[www.nextorch.com](http://www.nextorch.com). myTorch S AA可用配件: SL6, LC6, LR6 AA, UC1, UC2, UC3, UCC, DC1, V2, V1438, G46-A, HM1 包装所含配件: 数据线、电筒套、手绳、线圈、头部O型圈、尾部O型圈

纳丽德终身保修条款

1. 纳丽德承诺: 因产品本身出现的质量问题及缺陷, 纳丽德将提供终身免费保修服务或更换服务。
2. 因使用不当或擅自改装、维修而引起的产品缺陷、损坏, 不在终身保修范围之内。
3. 充电电池保修期限为自购买日起一年之内。
4. 所有随产品附带的配件 (充电电池除外), 不在保修范围之内。

名称: myTorch S AA说明书  
软件: Illustrator 15  
颜色: K  
分辨率: 300 dpi  
成品尺寸: 110mmX53mm  
展开尺寸: 110mmX265mm  
印刷说明: 105克铜版纸单色双面印刷  
刀膜说明: —— 裱线  
- - - - 折叠线  
是否转曲: 已转曲线